




Global Choice International

Different design of roof material.

Email:WFL89@163.COM, CELL:86-1357-2266-768, 1-630-347-1788

picture	Description
	Classical Tile 1340 x 420 x 0.4 mm
	Modern Classical Tile 1340 x 420 x 0.4 mm
	Rainbow Tile 1340 x 420 x 0.4 mm
	Wood shake Tile 1340 x 420 x 0.4 mm
	Shingle Tile 1340 x 420 x 0.4 mm
	Roman Tile 1340 x 420 x 0.4 mm

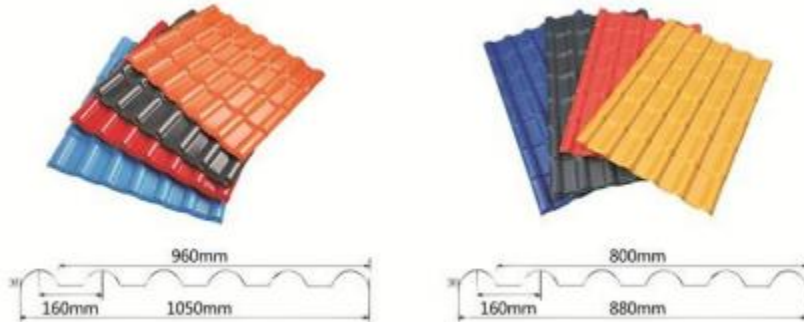


Synthetic Resin Roof Tile





Overall Width	1050mm	880mm	
Useful Width	960mm	800mm	
Thickness	2.3/2.5/3.0±0.1mm		
Wave Height	30mm		
Length	Customized (Should be multiple of 220mm)		
Purlin Space	660mm		
Weight	2.3mm:≈4.6kg/m ²	2.5mm:≈5.0kg/m ²	3.0mm:≈6.0kg/m ²
Container Loading Capacity	Thickness	m ² / 20FCL(21Tons)	m ² / 40FCL(26Tons)
	2.3mm	4500 m ²	5300 m ²
	2.5mm	4000 m ²	5000 m ²
	3.0mm	3500 m ²	4000 m ²

Color Choice



Item	Picture	Size(mm)	Application
Main Ridge		Length:1050/880mm Useful Length:960/800mm	Covering on main roof ridge
Diagonal Ridge		Length:1050/880mm Useful Length:960/800mm	Covering on side ridge
Three-Way Ridge		280mm + 200mm x 2	Connecting to main ridge and diagonal ridge
End Cap		Length:250mm	End capping of main ridge or diagonal ridge
Verge Board		Length:480mm	Eaves flashing
Vertical Wall Flashing Board		Length:1050/880mm Useful Length:960/800mm	Vertical Wall Flashing
Gable Flashing Board		Length:1050/880mm	Gable Wall Flashing
Inside/Outside Flashing Board		Length:1700mm	Dormant Window Gutter Flashing
Top Ridge		Cornice Board	
Water-Proof Accessories		Recommend 4 sets/m ²	


PVC/UPVC/APVC/AUPVC
Corrugated Sheet

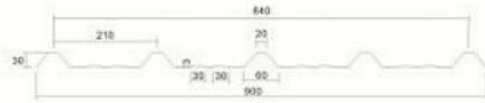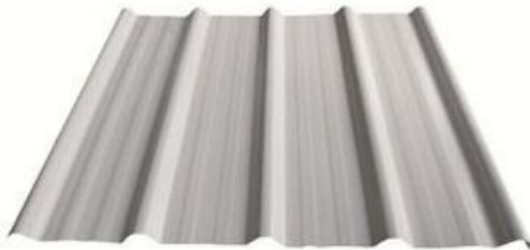

GC900T




GC900W

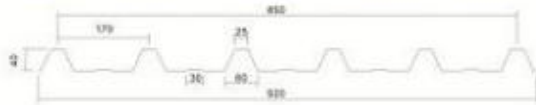

GC920



GC1050

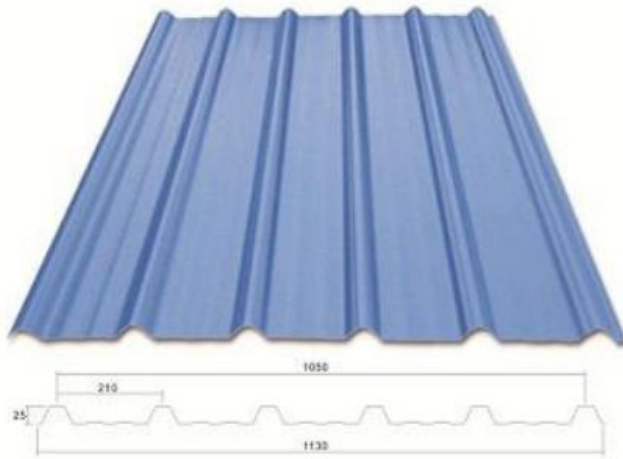

GC1130

Anti-Corrosion Polyester Sheet

