

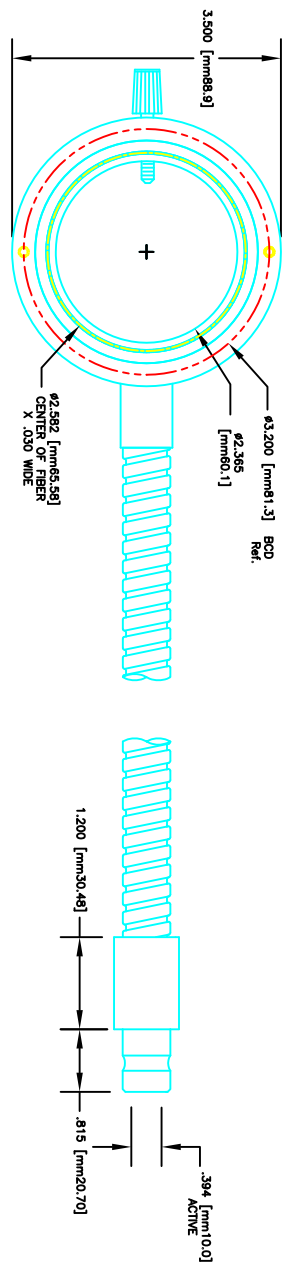


SYD	DESCRIPTION	REV BY	DATE	APPROVED
A	RELEASED	KDS	10/04/09	KS

REVISIONS

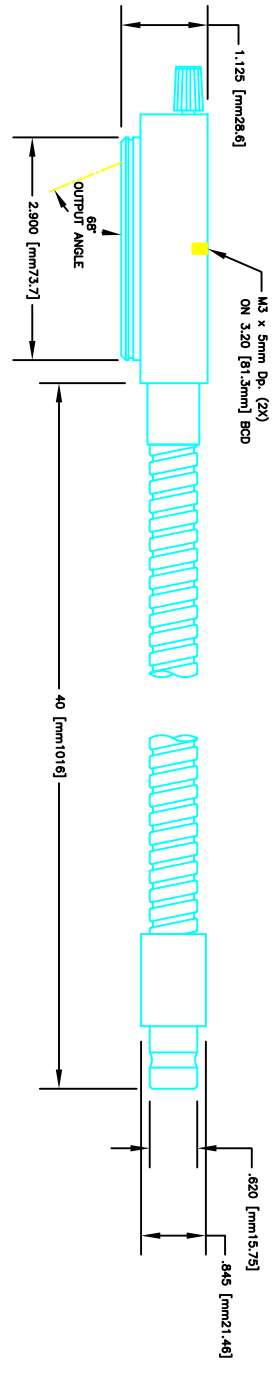

- NOTES:
- 1) FIBER: GLASS, 50 MICRON
 - 2) RING MATL: ALUMINIUM
 - 3) FINISH: BLACK ANODIZED
 - 4) THUMB SCREW THREADS - M4
 - 5) T "ER" FERRULE MADE FROM 6061 ALUMINIUM
 - 6) HIGH TEMP EPOXY TO BE USED



DET. POLARIZER GROOVE (2X)

P/N 9021HT

MAKE FROM:

UNLESS OTHERWISE INDICATED:
 INTERPRET PER ANSI/ASME Y14.
 DIMENSIONS ARE INCHES AND DO
 NOT INCLUDE APPLIED FINISHES.
 BREAK SHOWN AT ENDS OF DIMENSIONS
 UNLESS OTHERWISE SPECIFIED.
 GENERAL TOLERANCES:
 3 PLACE DIMENSIONS: ±.005
 2 PLACE DIMENSIONS: ±.02
 FRACTIONS: 1/2
 MACHINED SURFACES: \sqrt{R}

APPLICABLE SPECIFICATIONS:

APPROVED BY: DATE

DRAWN BY: DATE

CHECKED BY: DATE

THIRD ANGLE PROJECTION

DRAWING TITLE: ANNUAL RINGLIGHT 60MM HT

SYRACUSE, NY USA

ILLUMINATION TECHNOLOGIES, INC.

SIZE: B

DRAWING NUMBER: 9021HT

REL. DATE: N/A

SCALE: N/A

SHEET OF: 1/1

REV. SYD: A

THE DRAWING AND ITS CONTENTS ARE THE PROPERTY OF ILLUMINATION TECHNOLOGIES, INC. IT IS PROVIDED WITH THE UNDERSTANDING THAT THE INFORMATION CONTAINED HEREIN IS CONFIDENTIAL AND PROPRIETARY. NO REPRODUCTION OR TRANSMISSION IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, IS PERMITTED WITHOUT THE WRITTEN PERMISSION OF ILLUMINATION TECHNOLOGIES, INC. OR ITS DESIGNATED AGENTS.