


REVISIONS			
SYD	DESCRIPTION	REV#	DATE
A	RELEASED	KOS	12/11/08
B	CHANGED INPUT FERRULE TO IT ER FERRULE	KOS	10/04/09
			APPROVED
			KS

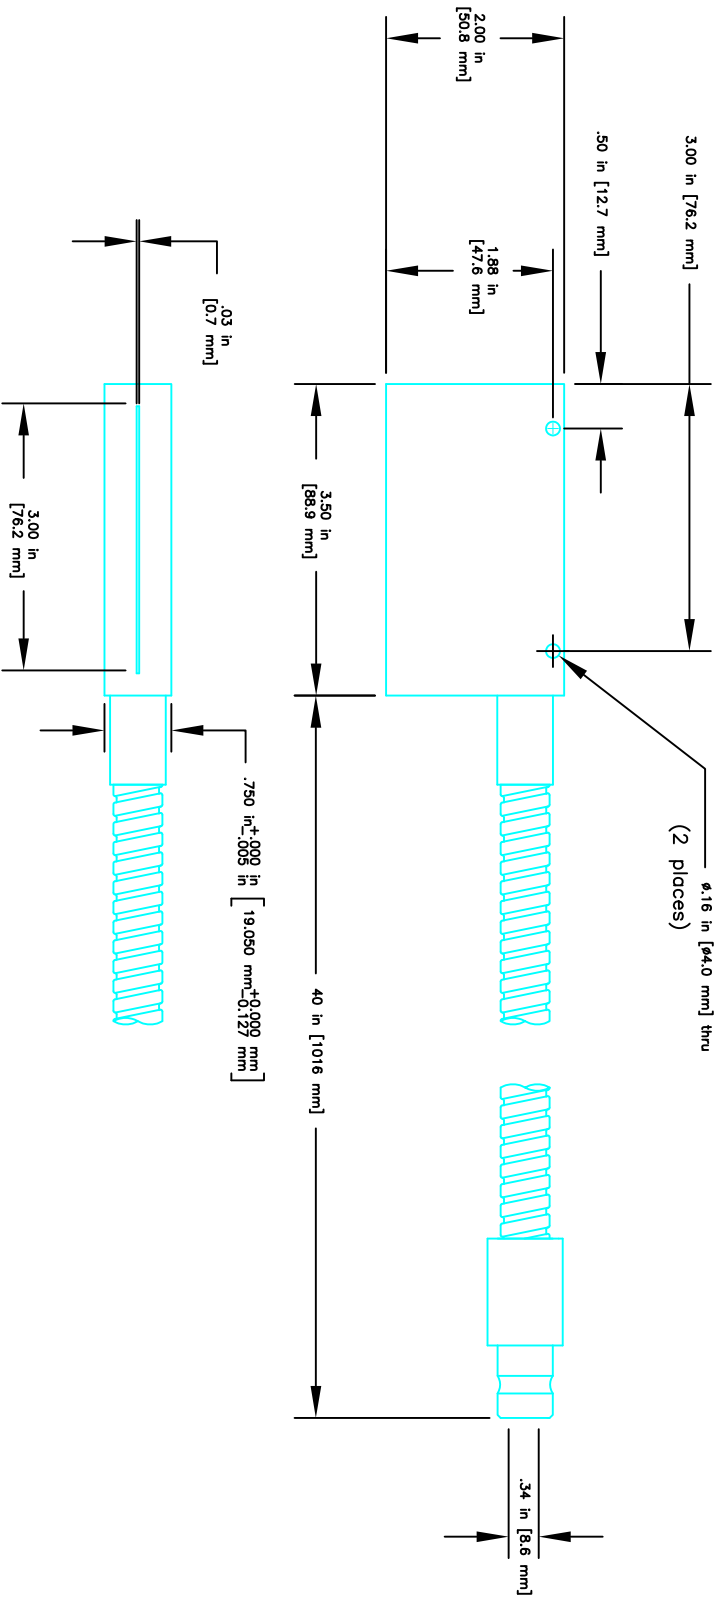

- NOTES:
- 1) FIBER: GLASS, 50 MICRON, <0.7dB/m
 - 2) HEAD MATERIAL: ALUMINIUM
 - 3) FINISH: BLACK HARDCOAT
 - 4) HOLES: DRILL BEFORE ANODIZE
 - 5) SHEATH: FLEX STAINLESS STEEL
 - 6) UNIFORMITY: ±10%
 - 7) ALL FASTENERS TO BE SST
 - 8) HIGH TEMP EPOXY TO BE USED
 - 9) IT "ER" FERRULE MADE FROM 6061 ALUMINIUM

P/N 9135HT

MAKE FROM:
UNLESS OTHERWISE INDICATED:
INTERPRET PER ANSI/ASME Y14.
DIMENSIONS ARE INCHES AND DO
NOT INCLUDE APPLIED FINISHES.
BRICK SPINDLES & CORNERS
BEYOND SPINDLES & CORNERS
GENERAL TOLERANCES:
3 PLACE DIMENSIONS: ±.005
2 PLACE DIMENSIONS: ±.02
FRACTIONS: 1/2
ANGLES: ±1/2
MACHINED SURFACES: $63 \sqrt{\text{R}}$

APPLICABLE SPECIFICATIONS:

IT
Illumination Technologies, Inc.
Syracuse, NY USA

THIRD ANGLE PROJECTION
DRAWN BY: KOS DATE: 12/11/08
CHECKED BY: KOS DATE: 12/11/08
APPROVED BY: KS DATE: 12/11/08

DRAWING TITLE: Lightine, 3" [76.2 mm] Single HT
DRAWING NUMBER: 9135HT
REL. DATE: N/A
SCALE: N/A
SHEET 1/1

THIS DRAWING AND ITS CONTENTS ARE THE PROPERTY OF ILLUMINATION TECHNOLOGIES, INC. IT IS PROVIDED WITH THE UNDERSTANDING THAT THE INFORMATION CONTAINED HEREIN IS CONFIDENTIAL AND PROPRIETARY. NO REPRODUCTION, DISTRIBUTION, OR DISSEMINATION OF THIS DOCUMENT OR ITS CONTENTS WITHOUT THE WRITTEN AUTHORIZATION OF ILLUMINATION TECHNOLOGIES, INC. IS PERMITTED.