


SYD	DESCRIPTION	REV. BY	DATE	APPROVED
A	RELEASED	KOS	10/04/09	KOS

REVISIONS

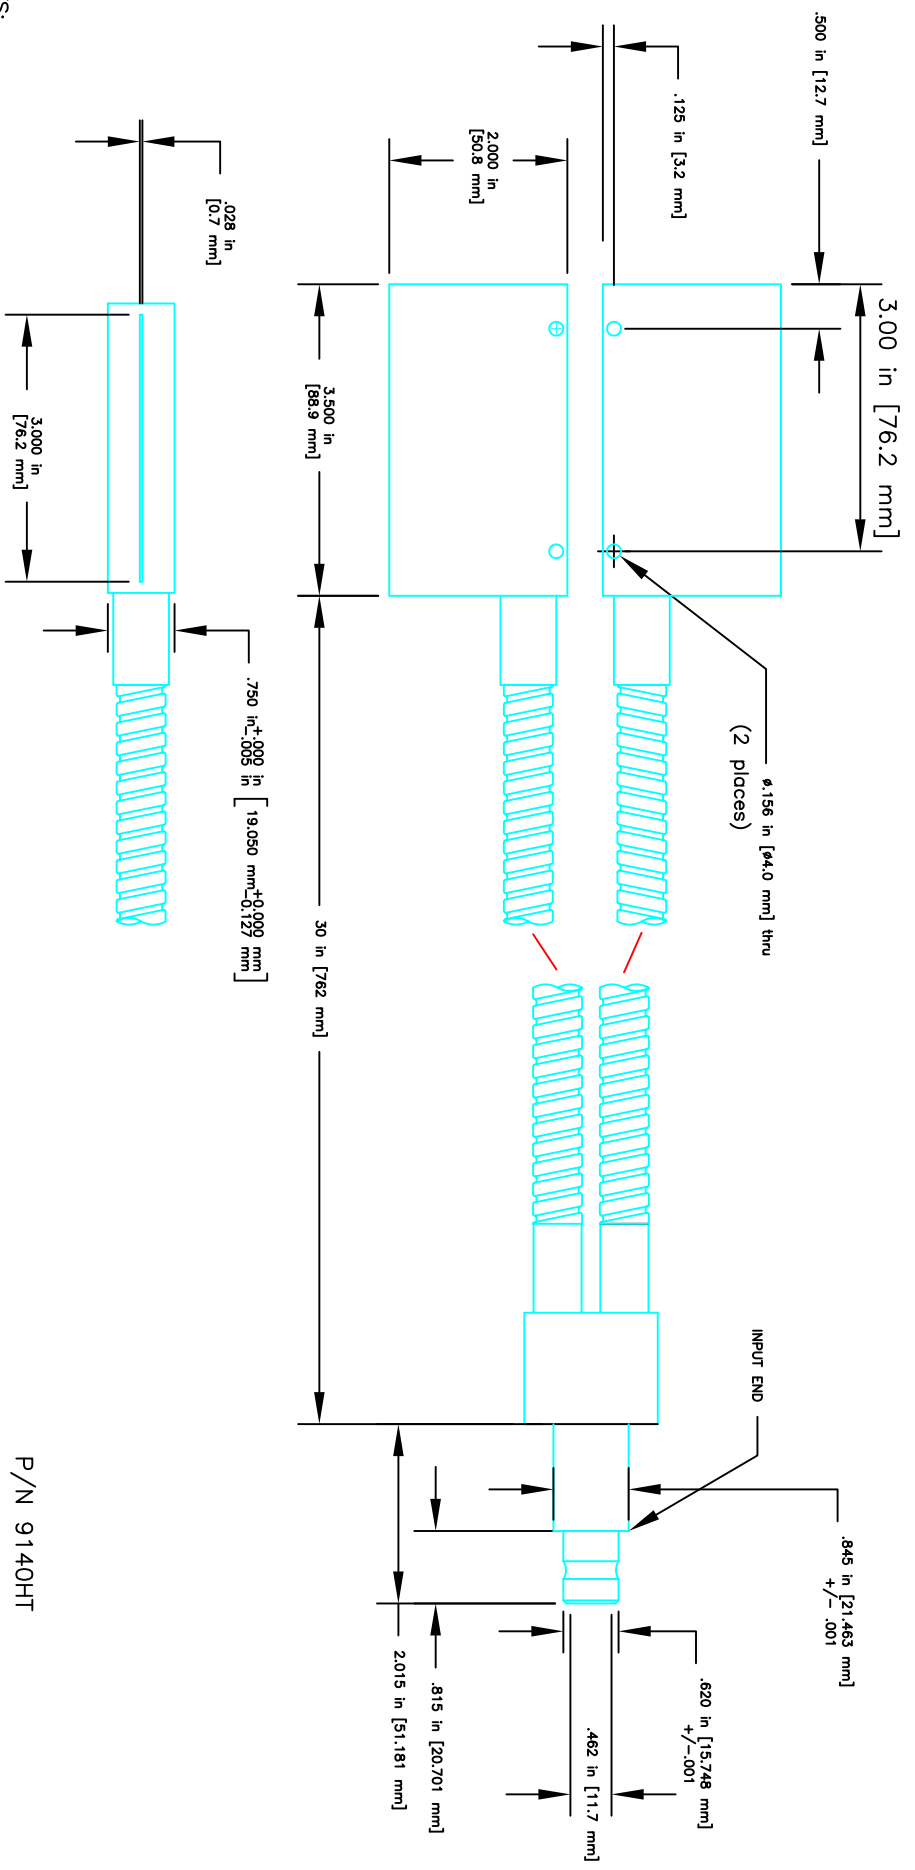

NOTES:

- 1) FIBER: GLASS, 50 MICRON, <0.7dB/m
- 2) HEAD MATERIAL: ALUMINIUM
- 3) FINISH: BLACK HARDCOAT
- 4) HOLES: DRILL BEFORE ANODIZE
- 5) SHEATH: FLEX STAINLESS STEEL
- 6) UNIFORMITY: ±10%
- 7) ALL FASTENERS TO BE SST
- 8) HIGH TEMP EPOXY TO BE USED
- 9) INPUT END TO BE MADE FROM 6061 ALUMINIUM

MAKE FROM:

UNLESS OTHERWISE INDICATED:
 INTERPRET PER ANSI/ASME Y14.
 DIMENSIONS ARE INCHES AND DO
 NOT INCLUDE APPLIED FINISHES.
 BRICK SPINDLES, EDGES & CORNERS
 RICK OF SPINDLES & CHAMFER.
 GENERAL TOLERANCES:
 3 PLACE DIMENSIONS: ±.005
 2 PLACE DIMENSIONS: ±.02
 FRACTIONS: 1/64
 ANGLES: ±1/2°
 MACHINED SURFACES: \sqrt{R}

APPLICABLE SPECIFICATIONS:



Illumination Technologies, Inc.
 Syracuse, NY USA

THIRD ANGLE PROJECTION	DRAWING TITLE	DRAWING NUMBER	REL. DATE	SCALE	SHEET OF
DATE: 10/04/09	Lightline, 3in [76.2 mm], Dual HT	9140HT		NTS	1/1
APPROVED BY: KS	DATE: 10/04/09	DESIGNED BY: KS	DATE: 10/04/09		REV: SW

THIS DRAWING AND ITS CONTENTS ARE THE PROPERTY OF ILLUMINATION TECHNOLOGIES, INC. IT IS PROVIDED WITH THE UNDERSTANDING THAT THE INFORMATION CONTAINED HEREIN IS CONFIDENTIAL AND PROPRIETARY. NO REPRODUCTION OR TRANSMISSION IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, IS PERMITTED WITHOUT THE WRITTEN PERMISSION OF ILLUMINATION TECHNOLOGIES, INC. BY ITS OWN AUTHORIZED AGENTS.