REVISIONS

SYM	DESCRIPTION	REV BY	DATE	APPROVED
A	RELEASED	KDS	12/12/12	KS
B	.550 WAS .525	KDS	01/10/13	KS

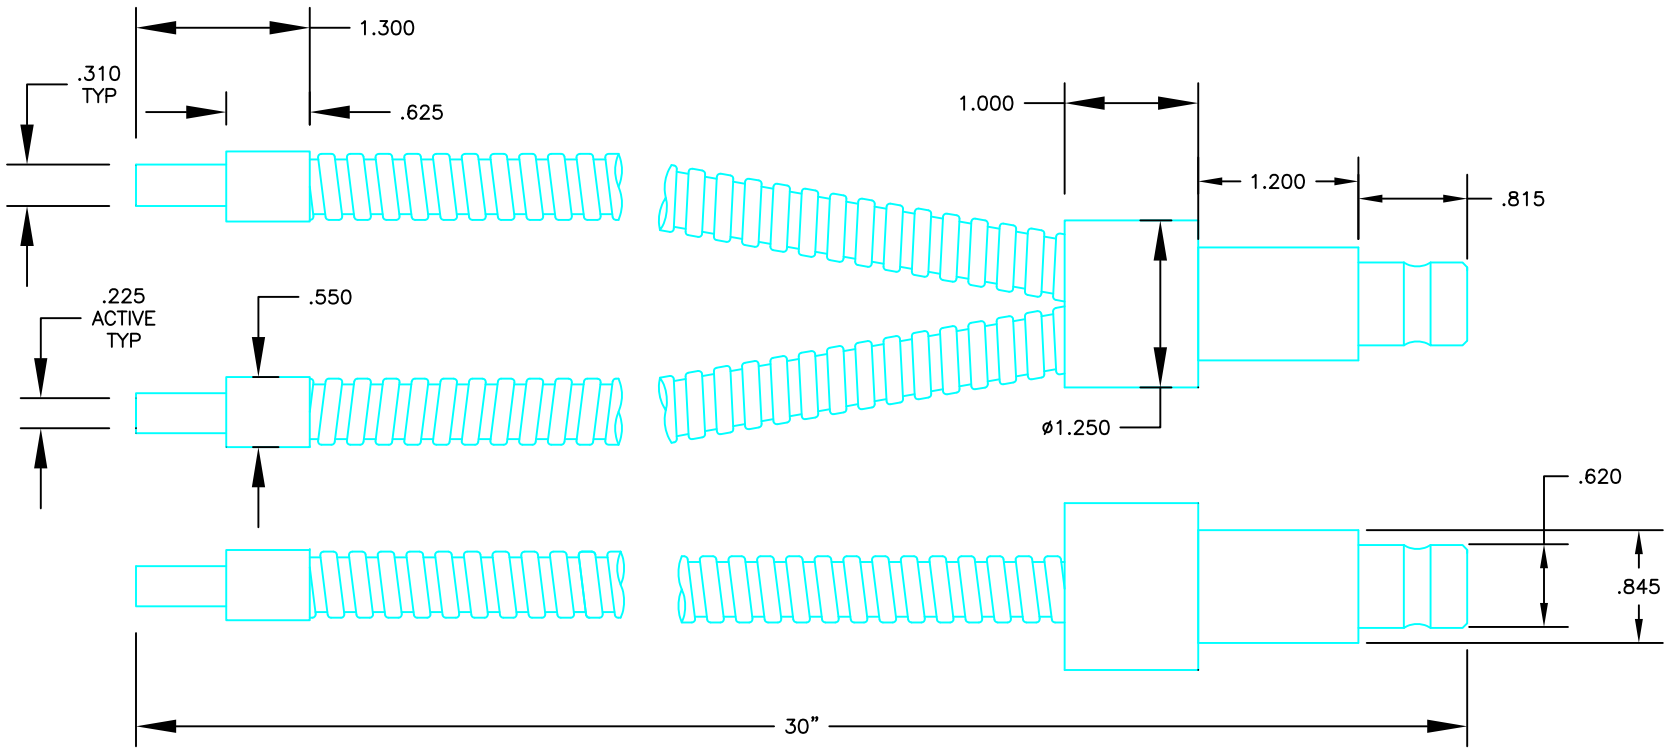

P/N 9240HT

NOTES:

1) IT "ER" FERRULE MATL: ALUMINUM
2) IT "ER" FERRULE FINISH: BLACK ANODIZE
3) SHEATH: FLEX SS
4) HIGH TEMP EPOXY TO BE USED
5) FIBER: 50 MICRON GLASS

MAKE FROM:

UNLESS OTHERWISE INDICATED:
INTERPRET PER ANSI/ASME Y14.
DIMENSIONS ARE INCHES AND DO NOT INCLUDE APPLIED FINISHES.
BREAK SHARP EDGES & CORNERS .03/.01 RADIUS OR CHAMFER.
GENERAL TOLERANCES:
3 PLACE DIMENSIONS: ±.005
2 PLACE DIMENSIONS: ±.02
FRACTIONS: 1/64
ANGLES: ±1/2°
MACHINED SURFACES: 63√

APPLICABLE SPECIFICATIONS:

Illumination Technologies, Inc.
Syracuse, NY USA

THIRD ANGLE PROJECTION

DRAWING TITLE: HIGH TEMP DUAL LIGHTGUIDE, 30"

DRAWN BY	DATE	SIZE	DRAWING NUMBER	REV SYM
KDS	12/12/12	B	9240HT	B

CHECKED BY	DATE	REL DATE	SCALE	SHEET	OF
KS	12/12/12		NTS	1/1	

APPROVED BY DATE

THIS DRAWING AND ITS CONTENTS ARE THE EXCLUSIVE PROPERTY OF ILLUMINATION TECHNOLOGIES, INC. IT IS PROVIDED WITH THE UNDERSTANDING THAT THE INFORMATION CONTAINED HEREIN IS CONFIDENTIAL AND PROPRIETARY. NO REPRODUCTION OR OTHER USE OF THIS DOCUMENT IS ALLOWED WITHOUT WRITTEN PERMISSION OF ILLUMINATION TECHNOLOGIES, INC. OR ITS DULY AUTHORIZED AGENTS.