


SYM	DESCRIPTION	REV BY	DATE	APPROVED
A	RELEASED	NAR	02/20/12	KS

REVISIONS

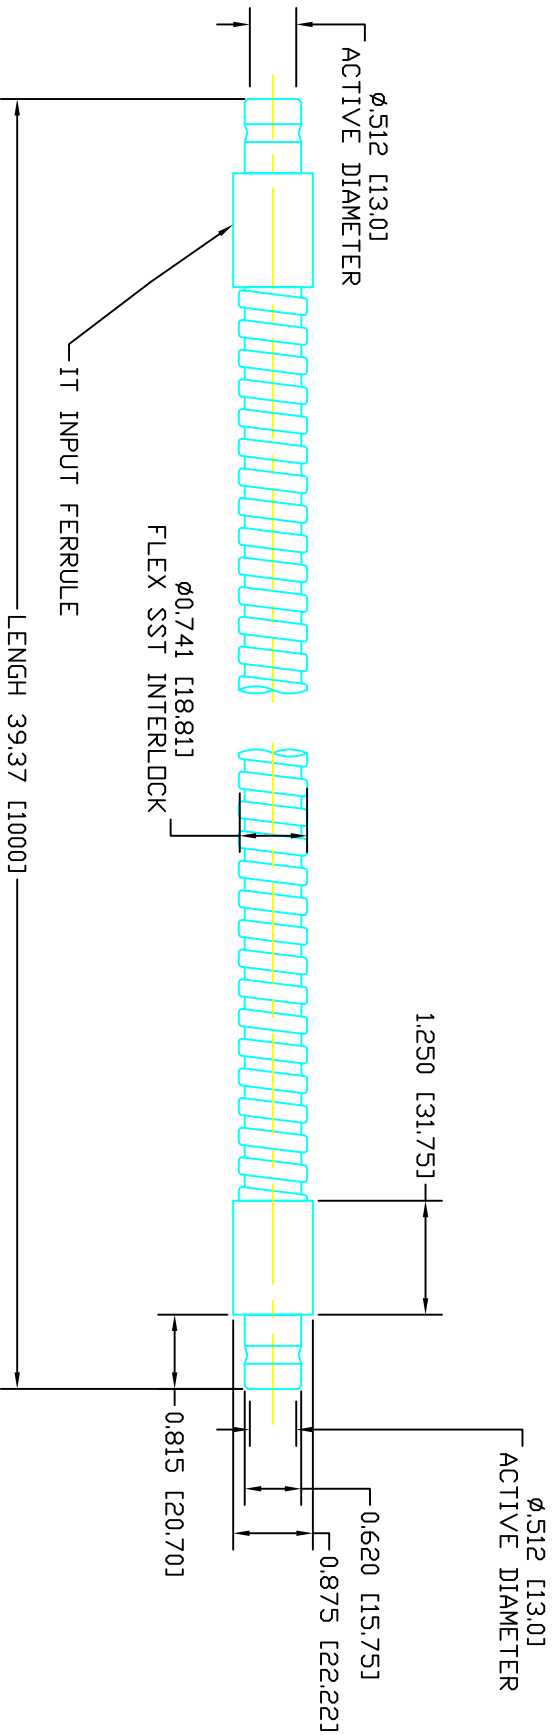

- NOTES:
- 1) FIBER: GLASS, 50 MICRON
  - 2) INPUT RANDOMIZED TO OUTPUT
  - 3) SHEATH: FLEX SST INTERLOCK
  - 4) FERRULES: 300 SERIES SST
  - 5) HIGH TEMP EPOXY TO BE USED

MAKE FROM: SEE NOTES

UNLESS OTHERWISE INDICATED:  
 INTERPRET PER ANSI/ASME Y14.  
 DIMENSIONS ARE INCHES AND DO  
 NOT INCLUDE APPLIED FINISHES.  
 BRCA OF SPINDLE EYES & CORNERS  
 OF ALL PARTS.  
 GENERAL TOLERANCES:  
 3 PLACE DIMENSIONS: ±.005  
 2 PLACE DIMENSIONS: ±.02  
 FRACTIONS: 1/64  
 ANGLES: 1/2°  
 MACHINED SURFACES: RS

APPLICABLE SPECIFICATIONS:



**Illumination Technologies, Inc.**  
 Syracuse, NY USA

THIRD ANGLE PROJECTION	DRAWING TITLE	REL. DATE	SCALE	SHEET OF
DRAWN BY NAR	1M LONG HIGH TEMP LIGHTGUIDE, 13MM ACTIVE	DATE 02/20/12	NTS	1 of 1
CHECKED BY KS	DRAWING NUMBER 9255HT	DATE 02/20/12		REV SYM A
APPROVED BY				

THIS DRAWING AND ITS CONTENTS ARE THE PROPRIETARY PROPERTY OF ILLUMINATION TECHNOLOGIES, INC. IT IS PROVIDED WITH THE UNDERSTANDING THAT THE INFORMATION CONTAINED HEREIN IS CONFIDENTIAL AND PROPRIETARY. NO REPRODUCTION OR TRANSMISSION IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, IS PERMITTED WITHOUT THE WRITTEN PERMISSION OF ILLUMINATION TECHNOLOGIES, INC. OR ITS DULY AUTHORIZED AGENTS.

P/N 9255HT