


SY#	DESCRIPTION	REV. BY	DATE	APPROVED
A	RELEASED	KDS	08/10/09	KS

REVISIONS

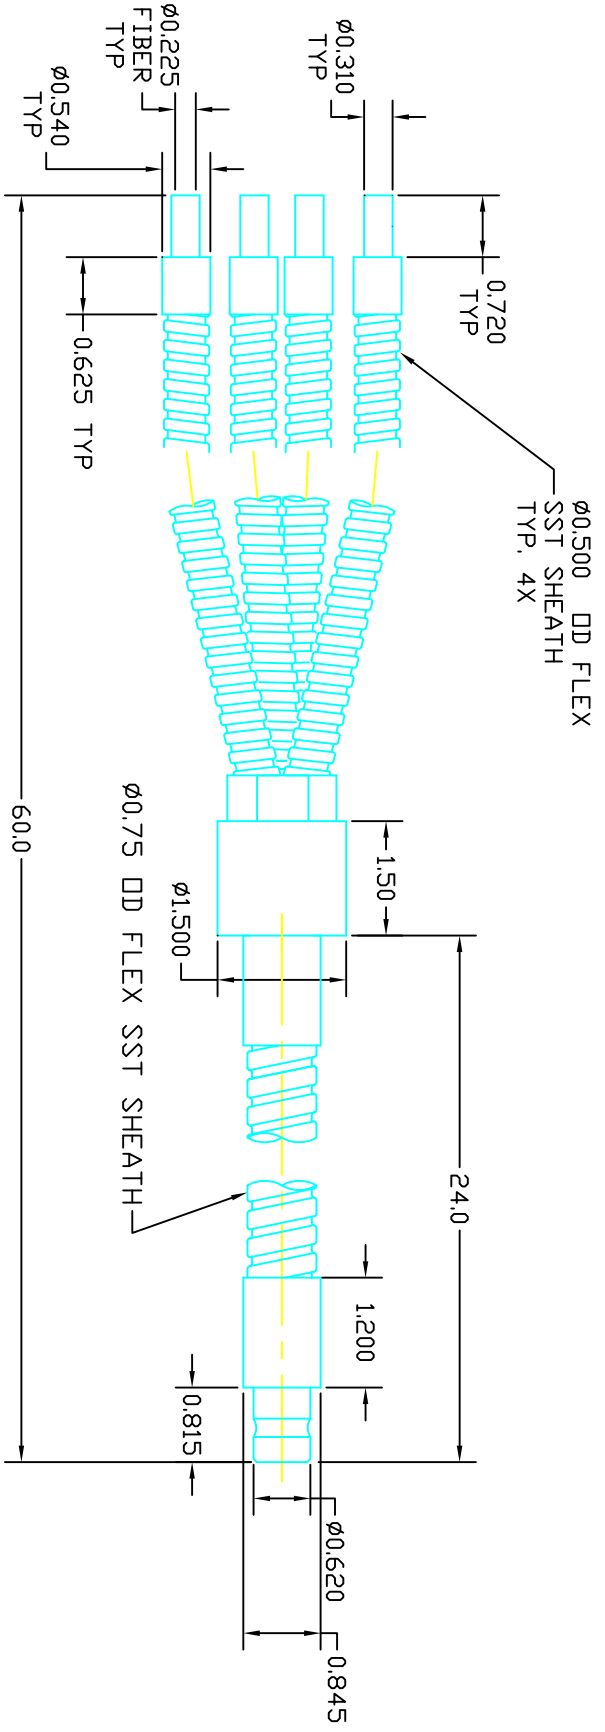

- NOTES
- 1) FITTINGS AND BARREL 300 SERIES SST AND ANODIZED ALUMINUM
 - 2) INPUT FULLY RANDOMIZED TO (4) OUTPUTS
 - 3) IT 'ER' FERRULE MADE FROM 6061 ALUMINUM
 - 4) HIGH TEMP EPOXY TO BE USED.

P/N 9270HT

MAKE FROM: SEE NOTE AND FEILD OF DRAWING

UNLESS OTHERWISE INDICATED: INTERPRET PER ANSI/ASME Y14. DIMENSIONS ARE INCHES AND DO NOT INCLUDE APPLIED FINISHES. BRCA, SPINDLE TIPS & CORNERS. GENERAL TOLERANCES: 3 PLACE DIMENSIONS: ±.005 FRACTIONS: 1/64 ANGLES: ±1/2°

MACHINED SURFACES:

APPLICABLE SPECIFICATIONS:

THIRD ANGLE PROJECTION	DRAWING TITLE	REL. DATE	SCALE	SHEET OF
	LIGHTGUIDE, RANDOMIZED 60° QUAD HT		NTS	1 of 1
DRAWN BY	DRAWING NUMBER	DATE	REV. BY	DATE
KDS	9270HT	08/10/09	KDS	08/10/09
APPROVED BY	DATE			
KS	08/10/09			

ILLUMINATION TECHNOLOGIES, Inc. SYRACUSE, NY USA

THE DRAWING AND ITS CONTENTS ARE THE SOLE PROPERTY OF ILLUMINATION TECHNOLOGIES, INC. IT IS PROVIDED WITH THE UNDERSTANDING THAT THE INFORMATION CONTAINED HEREIN IS CONFIDENTIAL AND PROPRIETARY. NO REPRODUCTION OR TRANSMISSION IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, IS PERMITTED WITHOUT THE WRITTEN PERMISSION OF ILLUMINATION TECHNOLOGIES, INC. OR ITS DESIGNATED AUTHORIZED AGENTS.