


SY#	DESCRIPTION	REV. BY	DATE	APPROVED
A	RELEASED	NAR	02/20/12	KS

REVISIONS

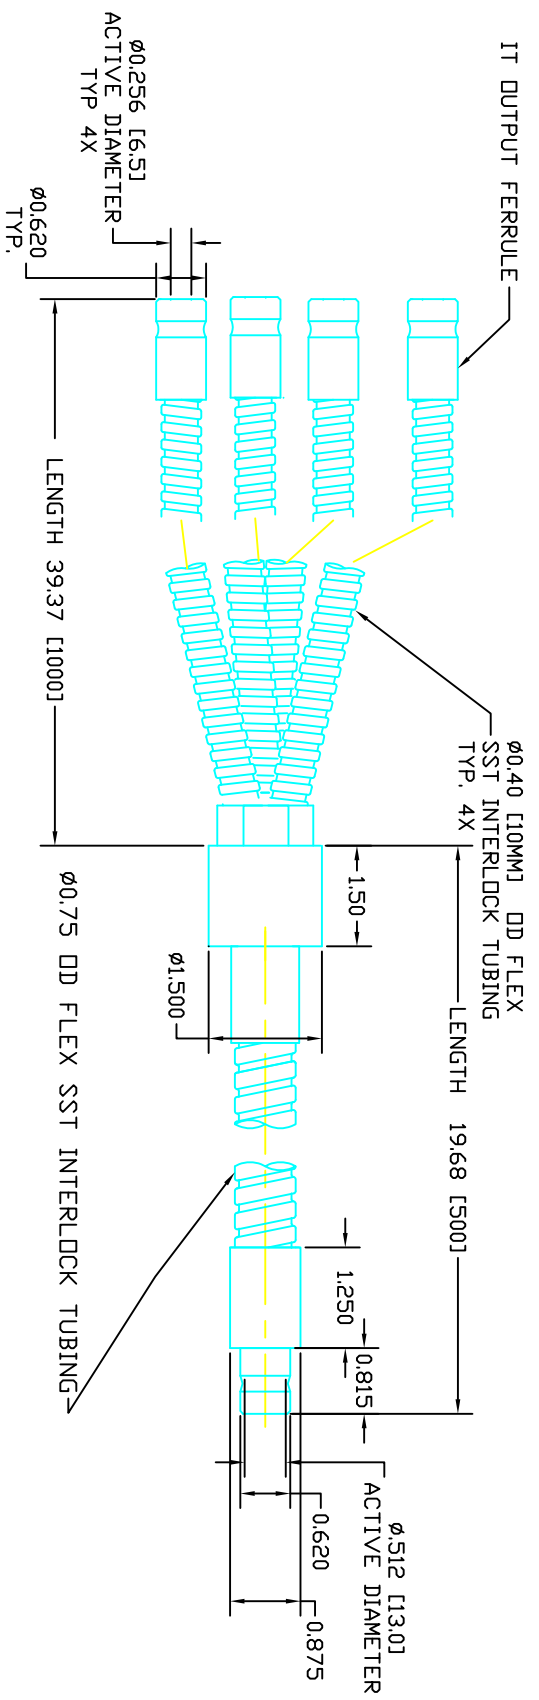

P/N 9275HT

- NOTES
- 1) FITTINGS AND BARREL 300 SERIES SST AND ANODIZED ALUMINUM
 - 2) INPUT FULLY RANDOMIZED TO (4) OUTPUTS
 - 3) FIBER: 50 MICRON GLASS
 - 4) HIGH TEMP EPOXY TO BE USED
 - 5) INPUT FERRULE TO BE ANODIZED ALUMINUM

MAKE FROM: SEE NOTE AND FIELD OF DRAWING

UNLESS OTHERWISE INDICATED: INTERPRET PER ANSI/ASME Y14. DIMENSIONS ARE INCHES AND DO NOT INCLUDE APPLIED FINISHES, BREAKS, SPINDLES, EDGES & CORNERS OF PARTS UNLESS OTHERWISE SPECIFIED.

GENERAL TOLERANCES:
 1 PLACE DIMENSIONS: ±.005
 2 PLACE DIMENSIONS: ±.02
 FRACTIONS: 1/64
 ANGLES: ±1/2°
 MACHINED SURFACES: \sqrt{R}

APPLICABLE SPECIFICATIONS:

THIRD ANGLE PROJECTION	DRAWING TITLE
	LIGHTGUIDE, 13MM ACTIVE TO QUAD 6.5
DRAWN BY: NAR	DATE: 02/20/12
CHECKED BY: KS	DATE: 02/20/12
APPROVED BY: KS	DATE: 02/20/12
SCALE: NTS	SHEET OF: 1 OF 1
REV. SW: A	

ILLUMINATION Technologies, Inc.
 Syracuse, NY USA

THIS DRAWING AND ITS CONTENTS ARE THE EXCLUSIVE PROPERTY OF ILLUMINATION TECHNOLOGIES, INC. IT IS PROVIDED WITH THE UNDERSTANDING THAT THE INFORMATION CONTAINED HEREIN IS CONFIDENTIAL AND PROPRIETARY. NO REPRODUCTION OR TRANSMISSION IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, IS PERMITTED WITHOUT THE WRITTEN PERMISSION OF ILLUMINATION TECHNOLOGIES, INC. OR ITS DESIGNATED AUTHORIZED AGENTS.