


Photo Appendix:

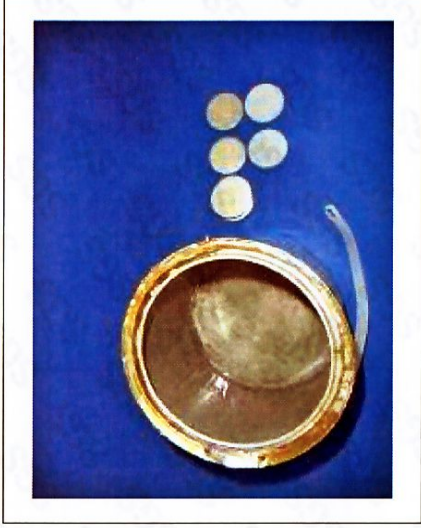

End of Report

www.globond.com

Attention: To check the authenticity of testing/inspection report & certificate, please contact us at telephone: (86-755)83071443, or email: CN.Doccheck@sgs.com

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/terms> and conditions. It is for electronic format documents subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability which applies within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



GUANGDONG GAOLI ALUMINIUM INDUSTRY CO., LTD
INDUSTRIAL DEVELOPMENT ZONE, YANGHE TOWN, GAOMING DISTRICT, FOSHAN,
GUANGDONG, P. R OF CHINA

The following sample(s) was / were submitted and identified on behalf of the client as:

Product Description: GLOBOND BRAND SOLID ALUMINIUM PANEL

SGS Ref No.: GP110720357-5.4, AJD201103384

We have tested the submitted sample(s) as requested and the following results were obtained:

Test Required:

EN 13501-1:2007+A1:2009 Fire classification of construction products and building elements – Part 1:
Classification using data from reaction to fire tests, Class A1

www.globond.com


Test Results: -- See attached sheet --

Test Duration:

Sample Receiving Date : Jul 25, 2011

Test Performing Date : Jul 25, 2011 to Sep 19, 2011

Signed for and on behalf of
SGS-CSTC Ltd.


May Huo
Engineer

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/terms> and conditions. It is the Client's responsibility to ensure that the sample(s) tested and such sample(s) are retained for 30 days only. The Company's liability and jurisdiction issues defined therein. Any holder of this document is advised that information contained herein reflects the Company's findings at the time of its testing only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



I. Test conducted

This test is conducted as per EN 13501-1:2007+A1:2009 Fire classification of construction products and building elements — Part 1: Classification using data from reaction to fire tests. And the test methods as following:

1. EN ISO 1182-2010, Reaction to fire tests for building products — Non-combustibility test;
2. EN ISO 1716-2010, Reaction to fire tests for building products — Determination of the heat of combustion.

II. Details of classified product

Color	Grey
Thickness(mm)	About 2.7mm
Mass per unit area	About 7.0kg/m ²

III. Test results

Test method	Parameter	Number of tests	Results
EN ISO 1182	$\Delta T/K$	3	1.8
	$\Delta m/\%$		7.55
	t_f/s		188
EN ISO 1716	PCS/ MJ/kg ^a	3	21.67 (Surface coating)
	PCS/ MJ/kg ^d		3.67

Note:

- ΔT — temperature rise [K]
- Δm — mass loss [%]
- t_f — duration of sustained flaming [s]
- PCS — gross calorific potential [MJ/kg or MJ/m²]

To be continued...

IV. Classification

This classification has been carried out in accordance with **EN 13501-1:2007+A1:2009**.

Conclusion: The product, SOLID ALUMINIUM PANEL does not meet the class A1 defined in EN 13501-1:2007+A1:2009.

Remark: The classes with their corresponding fire performance are given in annex A.

STATEMENT: The test results relate to the behaviour of the test specimens of a product under the particular conditions of the test; they are not intended to be the sole criterion for assessing the potential fire hazard of the product in use.

WARNING:

This classification report does not represent type approval or certification of the product.

The test laboratory has, therefore, play no part in sampling the product for the test, although it holds appropriate references to the manufacturer's factory production control that is aimed to be relevant to the samples tested and that will provide for their traceability.

Annex A

Classes of reaction to fire performance for construction products excluding floorings and linear pipe thermal insulation products

Class	Test method(s)	Classification criteria	Additional classification
A1	EN ISO 1182 ^a and	$\Delta T \leq 30^\circ\text{C}$, and $\Delta m \leq 50\%$, and $t_f = 0$ (i.e. no sustaining flaming)	-
	EN ISO 1716	PCSS $\leq 2.0 \text{ MJ/kg}$ ^a and PCSS $\leq 2.0 \text{ MJ/kg}$ ^{b,c} and PCSS $\leq 1.4 \text{ MJ/m}^2$ ^d and PCSS $\leq 2.0 \text{ MJ/kg}$ ^e	-
A2	EN ISO 1182 ^a or	$\Delta T \leq 50^\circ\text{C}$, and $\Delta m \leq 50\%$, and $t_f \leq 20 \text{ s}$	-
	EN ISO 1716	PCSS $\leq 3.0 \text{ MJ/kg}$ ^a and PCSS $\leq 4.0 \text{ MJ/m}^2$ ^b and PCSS $\leq 4.0 \text{ MJ/m}^2$ ^d and PCSS $\leq 3.0 \text{ MJ/kg}$ ^e	-
EN 13823		FIGRA $\leq 120 \text{ W/s}$ and LFS < edge of specimen and $THR_{600s} \leq 7.5 \text{ MJ}$	Smoke production ^f and Flaming droplets/particles ^g

To be continued...

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/terms> and conditions of liability and for electronic format documents subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of its jurisdiction only within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Results of related tests shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Class	Test method(s)	Classification criteria	Additional classification
B	EN 13823 and	FIGRA \leq 120W/s and LFS < edge of specimen and THR _{600s} \leq 7.5MJ	Smoke production ^f and Flaming droplets/particles ^g
	EN ISO 11925-2 ⁱ Exposure =30s	60s ^h Fss \leq 150mm	
C	EN 13823 and	FIGRA \leq 250W/s and LFS < edge of specimen and THR _{600s} \leq 15MJ	Smoke production ^f and Flaming droplets/particles ^g
	EN ISO 11925-2 ⁱ Exposure=30s	Fss \leq 150mm within 60 s	
D	EN 13823 and	FIGRA \leq 750W/s	Smoke production ^f and Flaming droplets/particles ^g
	EN ISO 11925-2 ⁱ Exposure=30s	Fss \leq 150mm within 60 s	
E	EN ISO 11925-2 ⁱ Exposure =15s	Fss \leq 150mm within 20s	flaming droplets/particles ^h
F	No performance determined		

^a For homogeneous products and substantial components of non-homogeneous products.

^b For any external non-substantial component of non-homogeneous products.

^c Alternatively, any external non-substantial component having a PCS \leq 2.0 MJ/m², provided that the product satisfies the following criteria of EN 13823: FIGRA \leq 20 W/s and LFS < edge of specimen, and THR_{600s} \leq 4.0 MJ, and s1, and d0.

^d For any internal non-substantial component of non-homogeneous products.

^e For the product as a whole.

^f In the last phase of the development of the test procedure, modifications of the smoke measurement system have been introduced, the effect of which needs further investigation. This may result in a modification of the limit values and/or parameters for the evaluation of the smoke production.

s1 = SMOGRA \leq 30m²/s² and TSP_{600s} \leq 50m²; s2 = SMOGRA \leq 180m²/s² and TSP_{600s} \leq 200m²; s3 = not s1 or s2

^g d0 = No flaming droplets/ particles in EN 13823 within 600 s;

d1 = no flaming droplets/ particles persisting longer than 10s in EN 13823 within 600 s;

d2 = not d0 or d1.

Ignition of the paper in EN ISO 11925-2 results in a d2 classification.

^h Pass = no ignition of the paper (no classification);

Fail = ignition of the paper (d2 classification).

ⁱ Under conditions of surface flame attack and, if appropriate to the end-use application of the product, edge flame attack.

Note: The above test was conducted in SGS Anji Lab.

To be continued...

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/terms_and_conditions.htm and for electronic format documents subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, jurisdiction and jurisdiction issues defined therein. Any holder of this document is advised that information contained herein reflects the Company's findings at the time of its issue and is valid only within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior, written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise indicated, all results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



198 Kexu Road, Science Park Guangzhou Economic & Technology Development District, Guangzhou, China 510663
中国 · 广州 · 经济技术开发区科学城珠路198号

510663
510663

GZMR 0125742

www.cn.sgs.com
e sgs.china@sgs.com

Member of the SGS Group (SGS SA)