

BOLAND
Equipment Rentals

Vantel 29
Telescopic Aerial Lift



DEMAND BETTER

Hydraulic Leveled Platform
available on all models, allows
for simplified cleaning and safe
removal of an injured operator



Non-Insulated
Aluminum Inner Boom
for increased payload
and less wear and tear
on chassis



Bridgemount Pedestal
available for more space
in the cargo area



Remote Lower Controls
provides great visibility
for operation of the unit
from the ground



- Working Height: Up to 34' 9"
- Horizontal Reach: Up to 22' 8"
- Platform Capacity: Up to 350 lbs.



B.E.R. Equipment Rentals

282 Hudson Street
Hackensack, NJ 07601

Phone: 201-342-8020
Fax: 201-342-7902

www.berequipment.com



Vantel-29

Telescopic Aerial Lift

GENERAL SPECIFICATIONS

	VANTEL-29-N	VANTEL-29-NE
Horizontal Reach	20 ft. 8 in. (6.30 m)	22 ft. 7 in. (6.88 m)
Standard Platform Capacity	350 lbs. (159 kg)	350 lbs. (159 kg)
Outer Boom Travel	-8° to +80°	-8° to +80°
Inner Boom Extension	116 in. (2.95 m)	116 in. (2.95 m)

Van Mount Pedestal (based on 30 in. (0.76 m) floor height.)

Height to Bottom of Platform	29 ft 3 in. (8.91 m)	30 ft. 1 in. (9.17 m)
Working Height	34 ft 3 in. (10.4 m)	35 ft. 1 in. (10.6 m)
Stowed Travel Height	10 ft. 1 in. (3.07 m)	10 ft. 1 in. (3.07 m)
Weight of Lift w/Mounting Hardware	1475 lbs. (670 kg)	1495 lbs. (679 kg)


Hydraulic System

Operating Pressure	2000 PSI (141 kg/cm ²)	2000 PSI (141 kg/cm ²)
Flow Rate	2 GPM (8 lpm)	2 GPM (8 lpm)
Filtration	10 micron return	10 micron return
	100 mesh suction	100 mesh suction
System Type	Open Center	Open Center

NOTE:
Specifications may vary without prior notification.

OPTIONS

- Continuous Rotation
- Emergency Lowering
- Emergency Power
- Pneumatic Circuit(s) to the Platform
- Various Platforms, Doors and Covers
- Adjustable Pedestal Riser
- Bumper Extensions
- 120 Volt Receptacle at Platform
- Platform Rotator

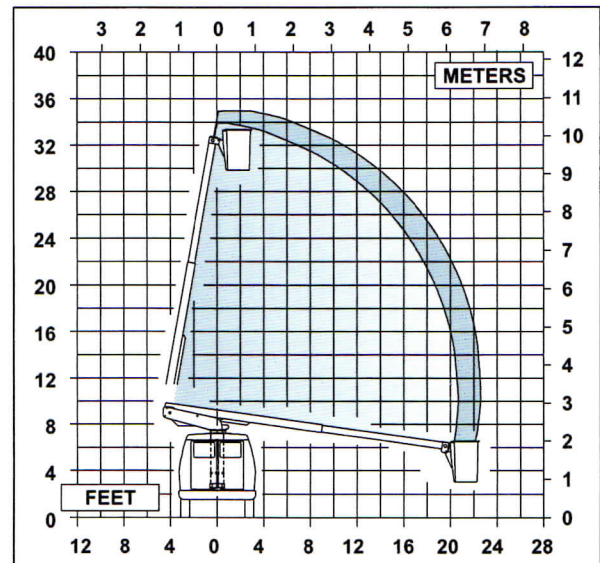

B.E.R. Equipment Rentals

282 Hudson Street
Hackensack, NJ 07601

Phone: 201-342-8020
Fax: 201-342-7902

www.berequipment.com