



Quick Strip Retro—LED

TECHBRITE™
Saving energy in the best possible LIGHT

Applications





- Warehouses
- Industrial
- Garage
- Retail
- Any Existing Strip

Features



Proudly made in the U.S.A

- Mounts Directly to Side of Existing Fixture
- Connect Power and Install—Driver affixed to Quick Strip
- 0-10v Dimming Driver Standard
- Available with and without a lens
- 4 Foot and 8 Foot
- Expandable to Multiple Fixture Widths—4.25" to 5.187"

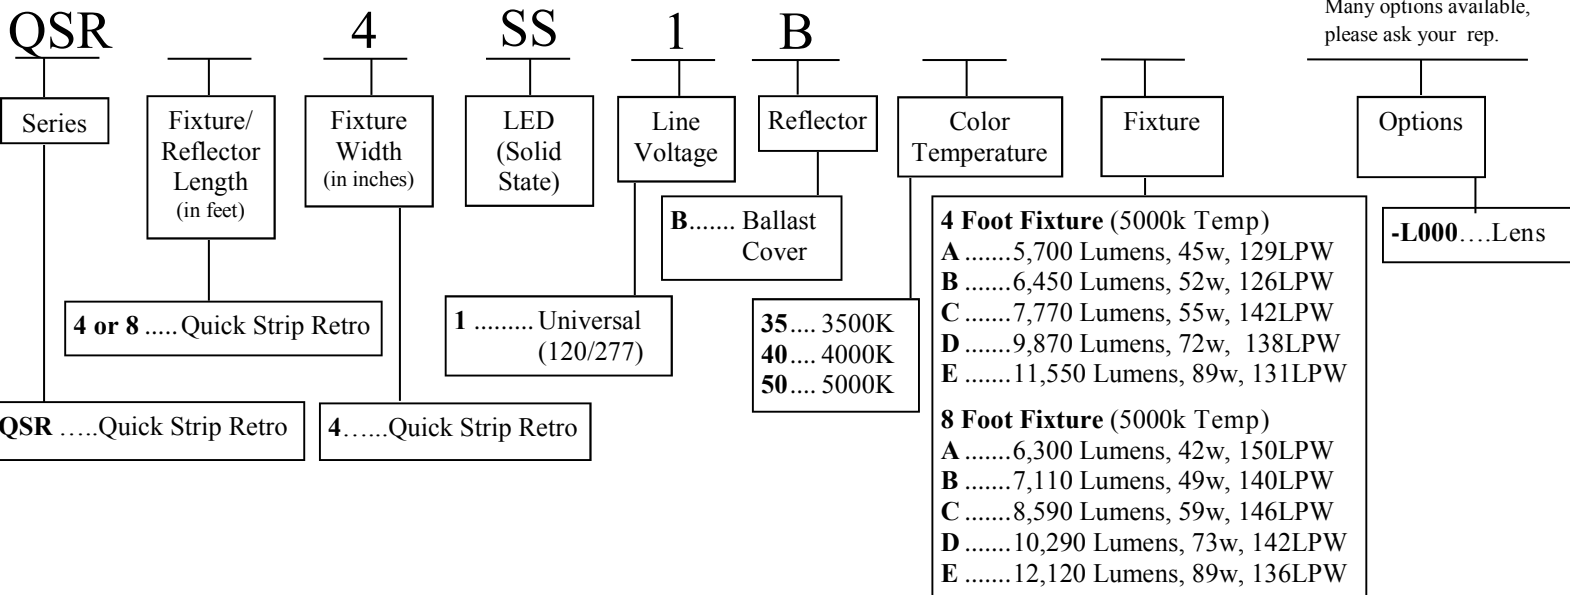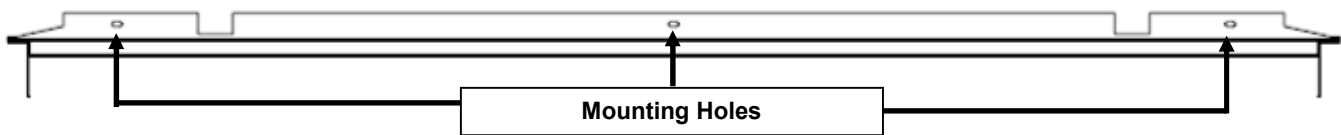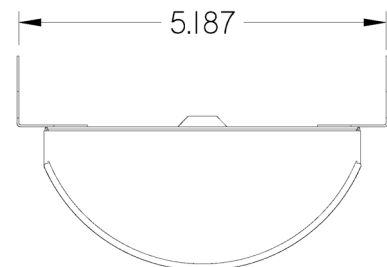

1000 Kieley Place., Cincinnati OH 45217

513-772-5070 office

513-252-0590 fax

www.techbrite.com

*Input wattage calculated using ballast manufacturer data in an open-air lamp application.

*Actual fixture wattage may vary based upon a variety of factors including: ballast factor; lamp wattage; input line voltage; ballast manufacturer; and/or environmental temperature.